



Preliminary Technical Information Sheet



KuMax SUPER HIGH EFFICIENCY POLY^{GEN 4} MODULE CS3U-345 | 350 | 355 | 360P (1000 V / 1500 V)

With Canadian Solar's industry leading poly-PERC cell technology and the innovative LIC (Low Internal Current) module technology, we are now able to offer our global customers high power poly modules up to 360 W.

The KuPower poly modules with a dimension of 2000 x 992 mm, close to our 72 cell MaxPower modules, have the following unique features:

- **Higher** power classes for equivalent module sizes
- **High** module efficiency up to 18.15 %
- **LOW** hot spot temperature risk
- **LOW** temperature coefficient (Pmax): -0.39 % / °C
- **LOW** NMOT (Nominal Module Operating Temperature): 43 ± 2 °C



More power output thanks to low NMOT: 43 ± 2 °C



Low power loss in cell connection




Safer: lower hot spot temperature



Heavy snow load up to 5400 Pa, wind load up to 2400 Pa



Low BoS cost with 1500 V_{DC} system voltage

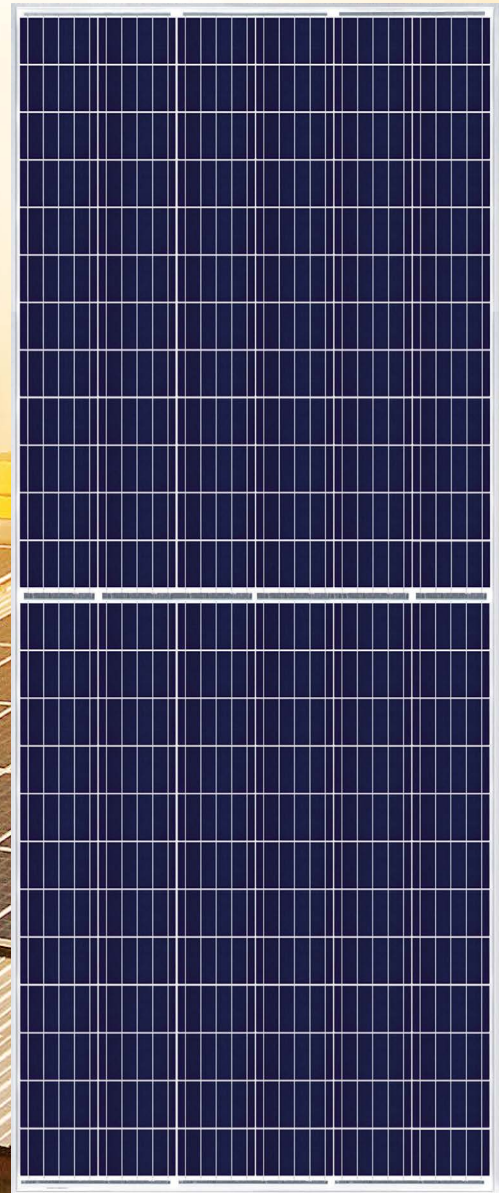

linear power output warranty



product warranty on materials and workmanship


PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730: 2005 & 2016: VDE / CE (pending)


* Please contact your local Canadian Solar sales representative for the specific product certificates applicable in your market.

ENGINEERING DRAWING (mm)


Rear View

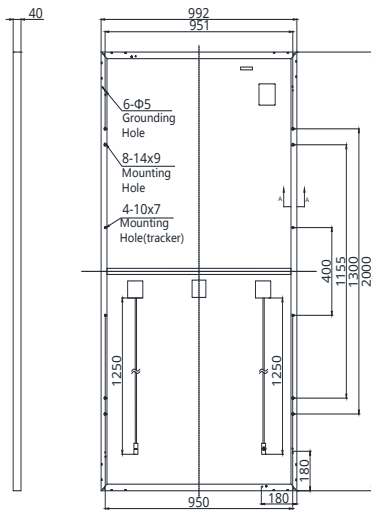


Frame Cross Section A-A



Mounting Hole



CS3U-355P / I-V CURVES

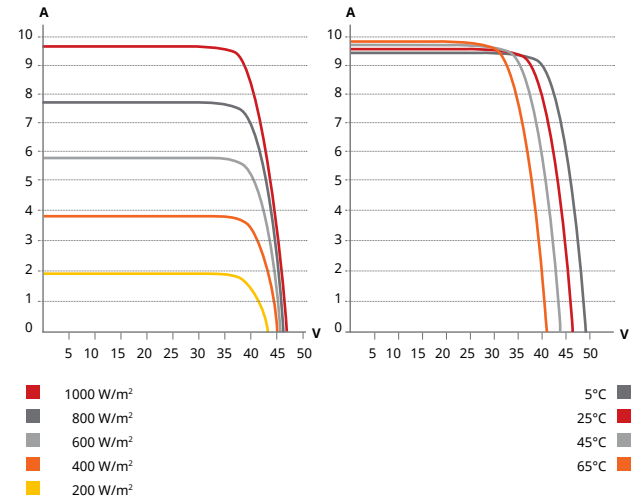

ELECTRICAL DATA | STC*

CS3U	345P	350P	355P	360P
Nominal Max. Power (Pmax)	345 W	350 W	355 W	360 W
Opt. Operating Voltage (Vmp)	39.0 V	39.2 V	39.4 V	39.6 V
Opt. Operating Current (Imp)	8.86 A	8.94 A	9.02 A	9.10 A
Open Circuit Voltage (Voc)	46.4 V	46.6 V	46.8 V	47.0 V
Short Circuit Current (Isc)	9.43 A	9.51 A	9.59 A	9.67 A
Module Efficiency	17.39%	17.64%	17.89%	18.15%
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1000 V (IEC / UL) or 1500 V (IEC / UL)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	30 A			
Application Classification	Class A			
Power Tolerance	0 ~ + 5 W			

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL DATA | NMOT*

CS3U	345P	350P	355P	360P
Nominal Max. Power (Pmax)	255 W	259 W	263 W	266 W
Opt. Operating Voltage (Vmp)	35.6 V	35.8 V	36.0 V	36.1 V
Opt. Operating Current (Imp)	7.18 A	7.24 A	7.31 A	7.37 A
Open Circuit Voltage (Voc)	43.3 V	43.5 V	43.7 V	43.8 V
Short Circuit Current (Isc)	7.62 A	7.68 A	7.75 A	7.81 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline, 156 × 78 mm
Cell Arrangement	144 [2 × (12 × 6)]
Dimensions	2000 × 992 × 40 mm (78.7 × 39.1 × 1.57 in)
Weight	22.4 kg (49.4 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy, crossbar enhanced
J-Box	IP68, 3 diodes
Cable	4.0 mm ² & 12 AWG
Cable Length	1250 mm (49.2 in), 1670 mm (65.7 in) is optional for single tracking system with leap-frog connection
Connector	T4 series or UTX or MC4 series (1500 V), T4 series (1000 V)
Per Pallet	27 pieces
Per Container (40' HQ)	594 pieces

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.39 % / °C
Temperature Coefficient (Voc)	-0.30 % / °C
Temperature Coefficient (Isc)	0.053 % / °C
Nominal Module Operating Temperature	43±2 °C

PARTNER SECTION



The aforesaid datasheet only provides the general information on Canadian Solar products and, due to the on-going innovation and improvement, please always contact your local Canadian Solar sales representative for the updated information on specifications, key features and certification requirements of Canadian Solar products in your region.

Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.