

IBS60M

KEY FEATURES



years
**Product
Warranty**



years
**Performance
Warranty**



Cell efficiency
up to **21.0 %**



Module efficiency
up to **19.0 %**



Heavy snow load
up to **5,400 Pa**



Wind load
up to **2,400 Pa**



PID Free



ELECTRICAL PARAMETERS


Model	IBS60M				
Maximum Power (Pmax/W)	280	285	290	295	300
Operating Voltage (Vmpp/V)	32.4	32.8	32.2	32.4	32.8
Operating Current (Impp/A)	8.65	8.70	8.75	9.12	9.16
Open-Circuit Voltage (Voc/V)	38.6	38.8	39.0	39.7	39.9
Short-Circuit Current (Isc/A)	9.32	9.39	9.46	9.64	9.71
Module Efficiency $\eta_m(\%)$	17.2	17.5	17.8	18.1	18.4
Power Tolerance	0+5 Wp				
NOCT	45±2°C				

Values at Standard Test Conditions STC (AM 1.5, Irradiance 1000 W/m², Cell Temperature 25°C)

SPECIFICATIONS

Cell Type	Mono Crystalline
Cells size	156x156 mm
Number of cells	60
Weight	18.5 kg
Front side glass	High transmission tempered glass
Dimensions	1,640x992x35 mm
Cable length	900 mm
Cable cross section size	4 mm ²
Number of bypass diodes	3
Connectors	MC4 / MC4 compatible
Frame	Anodized Aluminium Alloy
Junction Box	IP67 available

ENGINEERING DRAWINGS

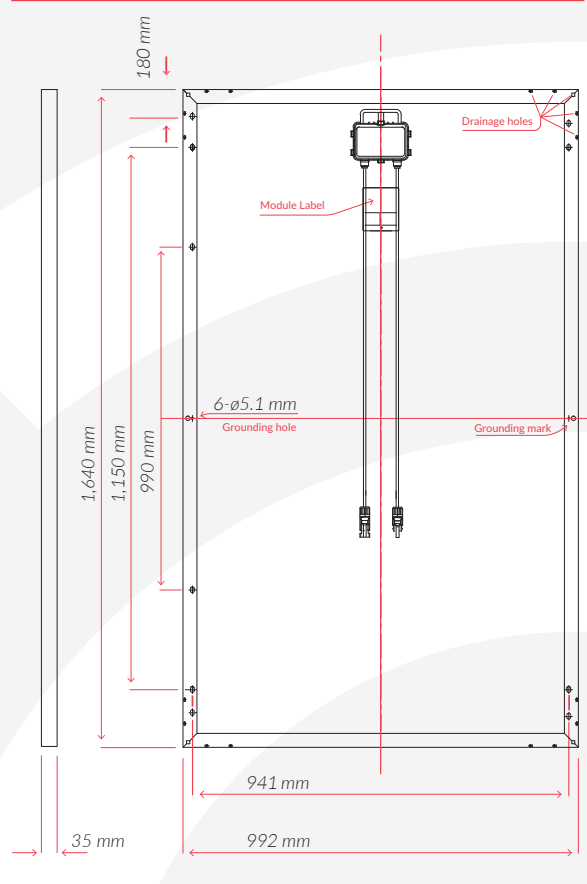

WORKING CONDITIONS

Maximum System Voltage	DC 1,000 V / 1,500 V available
Operating temperature	-40°C / +85° C
Maximum reverse current	15A
IP protection level	IP65
Safety class	II

TEMPERATURE COEFFICIENTS

Power temperature coefficient (Pmax)	-0,39 %/°C
Voltage temperature coefficient (Voc)	-0,29 %/°C
Current temperature coefficient (Isc)	+0,049 %/°C



PACKAGING INFORMATION (I)

Pallet dimension	1,690/1,120/1,120 mm
Pallet weight	600 kg
Modules/pallet	30

PACKAGING INFORMATION (II)

Container	20 GP	40 GP	40 HQ
Pallets per container	12	28	28
Pieces per container	360	840	910

PARTNERS